



When the parts were revised

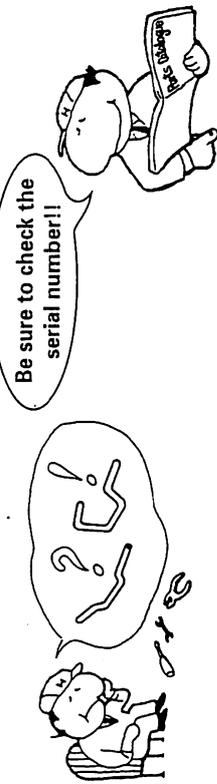

Ref. No.	Part No.	Description	Reqd. QTY			Serial No.
			V	AS	AW	
1	06431-MA3-405	SEAL SET, PISTON.....	4	-	-	
2	16106-KV7-900	CLIP B, TUBE.....	1	-	-	
3	17368-KV7-671	CLAMP, PIPE.....	1	-	-	
4	38520-MAJ-780	SENSOR, FR. WHEEL SPEED.....	1	-	-	4500529 4500424 (SM550041)
	38520-MAJ-781	SENSOR, FR. WHEEL SPEED.....	1	-	-	4500530 4500425 (SM550042)
5	43352-568-003	SCREW, BLEEDER.....	1	-	-	
6	43353-461-771	CAP, BLEEDER.....	2	-	-	

The number has been used from the initial model without revision. When shown at the left side, it is applicable to the models of No.SM550042 and the subsequent numbers. When shown at the right side, it is applicable to the models up to No.SM550041.

Abbreviations used in the parts catalogue

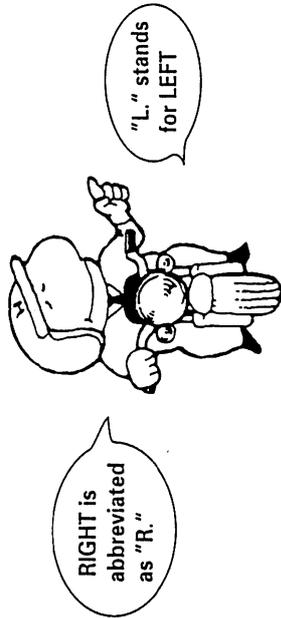

* "L." or "R." in the description of a part stands for the LEFT hand side or the RIGHT hand side. Determine the left or right as if you were in the motorcycle seat.

● The following abbreviations are used in this parts catalogue.

- ASSY. Assembly L (100L) Link (100 Links)
- COMP. Complete A.C. Alternating current
- R. Right D.C. Direct current
- L. Left IN. Inlet
- STD. Standard EX. Exhaust
- MM Millimeter FR. Front
- G Gram RR. Rear
- T (22T) Tooth (22 Teeth) HEX. Hexagonal
- A Ampere A.M. Attaching mark
- V Volt T.M. Transcript mark
- W Watt C.D.I. Capacitive discharge ignition
- WL With labelling ABS Anti-lock brake system
- WOL Without labelling TCS Traction control system
- L.E.D. Light emitted diode
- KPH Kilometers per hour
- MPH Miles per hour